


PRODUCT DATASHEET



PREMIER ENGINEERED SERIES

PERMA-BOND™

ANTI-CORROSION PIPE COATING

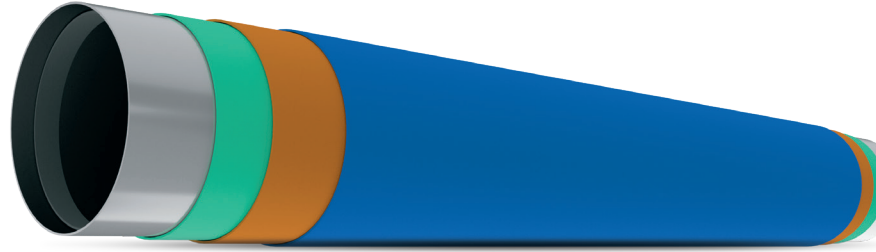

formerly Ultrabond IIISE (UBIIISE)

Temperature Range

-40 °C (-40 °F) to 85 °C (185 °F)

Pipe Sizes

NPS 3 - 60 (88.9 - 1524 mm)
up to 80 ft (24 m) lengths

Minimum Layer Thicknesses (Full System)

FBE ≥ 120 µm (4.7 mils)
Adhesive ≥ 100 µm (4.0 mils)
HDPE Option 1: ≥ 1 mm (40 mils)
Option 2: ≥ 1.5 mm (60 mils)
Bespoke thicknesses available

Sales Contacts

Rely on PERMA-PIPE to help provide the right anti-corrosion or insulating coating solutions for your project.

Please contact our Canadian sales office directly at (403) 264-4880 or askpermapipe@permapipe.com

PERMA-BOND™ Premier Engineered Series features our Ultrabond-IIISE, a fully bonded 3-Layer external pipe coating, consisting of a fusion bonded epoxy (FBE) primer, polymeric adhesive intermediate layer, and a high density polyethylene (HDPE) outer jacket. This robust coating provides exceptional corrosion, chemical, soil stress, and moisture resistance, as well as superior adhesion, cathodic disbondment, and abrasion protection. The Premier Engineered Series is designed for all types of pipelines, including directional drilling, slip bores, road crossings, and rocky terrain.

Technical Parameters

PROPERTY	CONDITIONS	TYPICAL VALUES*
Cathodic Disbondment	28 days @ 1.5 V @ 20 °C (68 °F) 24 hr @ 3.5 V @ 65 °C (149 °F)	≤ 7 mm (0.28 in) ≤ 3 mm (0.12 in)
Impact Resistance	-30 °C (-22 °F)	5 J / mm of HDPE (0.09 lbf ft / mil)
Flexibility	2.5° / PD @ -30 °C (-22 °F)	No Cracking of HDPE
UV Resistance		≤ 2 years
HDPE Peel Adhesion	20 °C (68 °F)	350 N (78.7 lbf)
Gouge Resistance	75 kg (165 lbs) w/ R33 Bit @ -30 °C (-22 °F) 50 kg (110 lbs) w/ R33 Bit @ 20 °C (68 °F)	≤ 1.5 mm depth w/ no primer exposed ≤ 1.5 mm depth w/ no primer exposed

Notes

*Typical values meet or exceed regulatory requirements and are based on historical data, not to be interpreted as product specification.

**CSA Z245.21-18 System B1.



PARTNERS IN EXCELLENCE

permapipe.com

PERMA-PIPE reserves the right to update, revise and amend all technical data or content at any time. PERMA-PIPE shall have no liability of any kind or nature for any technical errors or omissions in this document. The information contained in this document is subject to change without notice. The PERMA-PIPE brands, marks, and logos are trademarks of PERMA-PIPE International Holdings, Inc. (PPIH) in the United States and certain foreign countries. Please contact us at askpermapipe@permapipe.com for the latest update. PBPB Datasheet 05/18/2022.